


## BAE LX-VS-LW100-S26 BAE00NW

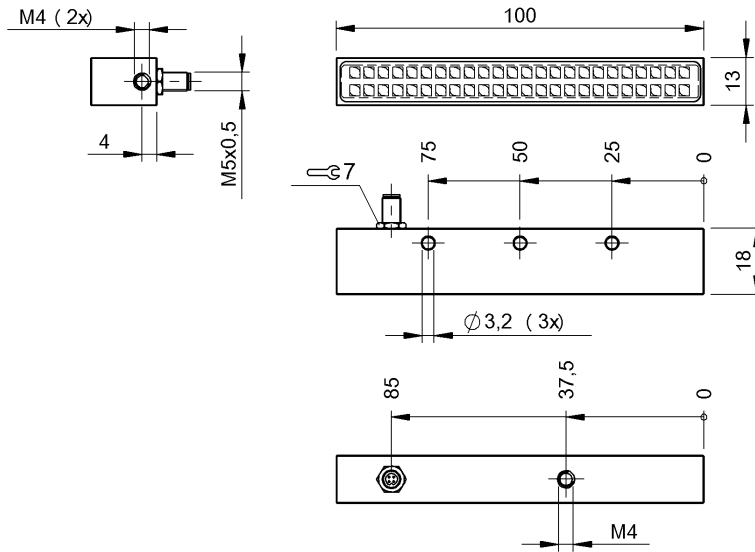

### Display/Operation

Adjuster no

### Electrical connection

Cable length 0.3 m  
 Connection M5x0.5-Connector, 4-pole  
 Connection type Connector, 0.30 m  
 Polarity reversal protected no

### Electrical data

Rated operating voltage Ue DC 24 V

### Environmental conditions

Ambient temperature -10...55 °C  
 Protection type IEC 60529 IP54

### General data

Approval/Conformity CE  
 Basic standard IEC 60947-5-2  
 Operating mode Normal  
 Boost  
 Scope of delivery Line light  
 Cable M5 to M12  
 Use for Vision sensor BVS  
 Version Strip light

### Material

Housing material Aluminum  
 Material sensing surface Glass  
 Surface protection anodized, black

### Mechanical data

Dimension 13 x 100 x 18 mm  
 Fastening detail Screw M4

### Optical data

Illumination area 95 x 10 mm  
 LED group per IEC 62471 Exempt Group  
 in Boost mode: Risk Group 1  
 Light type LED White light

### Output/Interface


Digital inputs Trigger  
 Input function Emitter on/off  
 Operating mode Normal/Boost

### Remarks


For additional information, refer to user's guide.  
 Order accessories separately.  
 Suitable for pulse operation.  
 Install the device so that no direct view of the light source is possible even during operation.

BAE LX-VS-LW100-S26  
BAE00NW

## Connector view



## Wiring Diagram

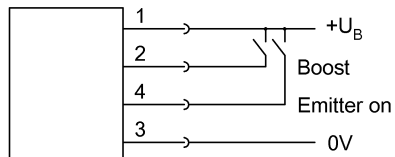

## Warning Symbols



LED light- DO NOT LOOK INTO THE BEAM!

LED group per IEC 62471

Note: for IR radiation and in Boost mode,  
use suitable shielding or eye protection.