


Connection cable

BIS L-503-PU1-15

Order code: BCC00R4

BALLUFF

sensors worldwide

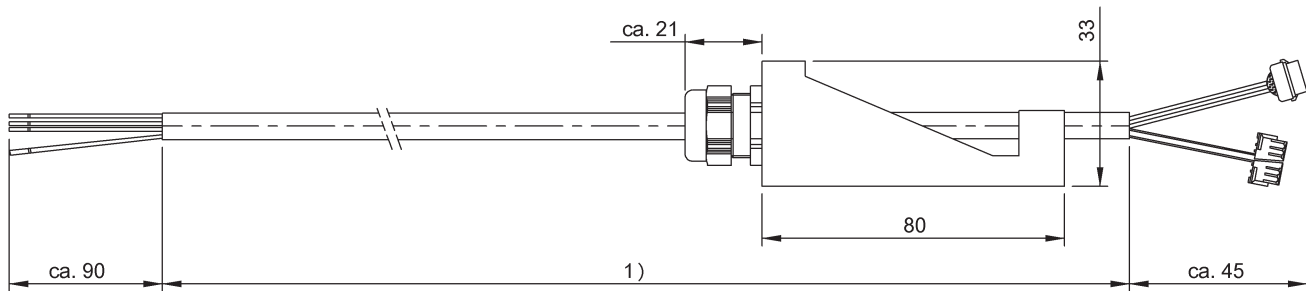

1) Cable length see notes



General attributes

Approvals / Conformity

Cable jacket color

Enclosure Type per IEC 60529

CE

black

IP65 mounted

Cable temp. max. (moved)

90 °C

Cable temp. min. (moved)

-30 °C

Cable temperature max.

90 °C

Cable temperature min.

-50 °C

Drag chain compatible

Yes

Electrical attributes

Mechanical attributes

Ambient temp. max.(drag chain)

90 °C

Ambient temp. min.(drag chain)

-30 °C

Bending radius tensioned cable

min. 12.5 x cable-Ø

Cable diameter D max.

7.5 mm

Cable jacket material

PU

Cable length L [m]

15.00 m

Additional text

Connection unit:

connecting BIS L-405-xx-MU

Drag chain compatible

Mounting base made of PBT with open cable end.