


BNI IOL-801-102-Z036
BNI0088

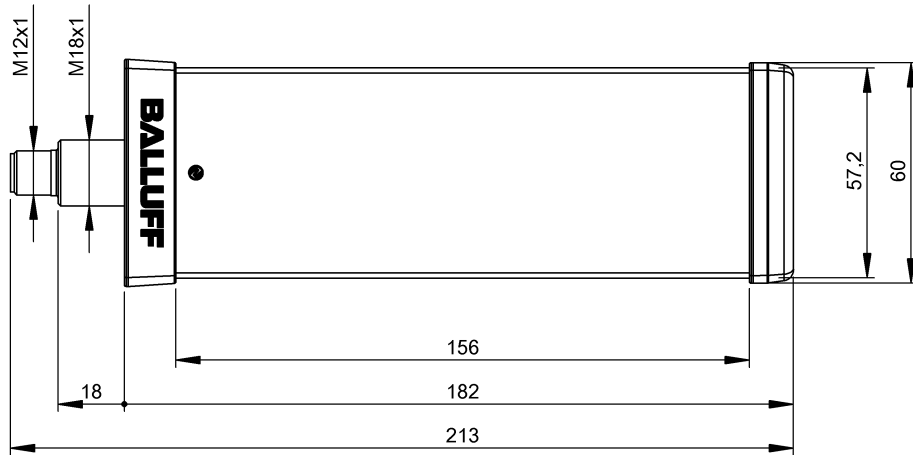

Display/Operation

Buzzer function	no
Function indicator	Chaser Level indicator Stack light
IO-Link communication indicator	LED green
Module supply indicator	LED green

Electrical connection

Contact, surface protection	nickel plated 2 µm/gold plated 0.4 µm
-----------------------------	--

Electrical data

Cycle time min.	7.2 ms
IO-Link function	Device
Operating voltage U_b	18...30.2 VDC
Rated operating voltage U_e DC	24 V
Segments, number max.	3

Environmental conditions

Ambient temperature	-5...50 °C
Protection type IEC 60529	IP65
Storage temperature	-25...50 °C

General data

Approval/Conformity	CE
Dimmable	yes
Life expectancy min.	50000 h
Predefined colors	yellow white green blue

Scope of delivery

red
configurable
orange
Lock washer
Rubber foot
Short guide
M4x6 screw
Hex nut M18x1

Material

Colors, number	7
Housing material	PC, Transparent
Housing shield	yes
Surface protection	Cu 15 µ Ni 15 µ

Mechanical data

Application weight	400.00 g
Dimension	60 x 60 x 215 mm
Fastening detail	1-hole screw mount
Frame type	2.V
Grounding cable attachment	M4

Output/Interface

Error signal	245 mA at 24V
IO-Link version	1.1
Process data cycle min.	7.2 ms
Process data in	1 byte
Process data out	8 bytes


Remarks

Installation instructions	See short guide
---------------------------	-----------------

BNI IOL-801-102-Z036

BNI0088

Connector view



IO-Link PIN 1: +24V PIN 2: n.c. PIN 3: GND PIN 4:
C/Q, IO-Link DC-Channel